

## DirectIP 16 Channel Decoder

# DD-1116


- Specialized in DirectIP NVR
- Supports DirectIP NVR
- Supports HDMI, VGA, CVBS port
- Up to 4 channel Full HD display
- Up to 16 channel real-time display

### SPECIFICATIONS

DECODER	
Video Compression	H.264
Video Input	16ch IP
Supported Devices	DirectIP NVR
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Display Resolution	HDMI, VGA : 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200 CVBS : 640x480
Display Speed	Up to 480ips
Max. Network Throughput	48Mbps
Network Connection	Gigabit Ethernet x 1
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Weight	0.84kg (1.85lb)
Operation Temperature	0°C ~ 40°C (32°F ~ 104°F)
PoE (Class)	Yes (IEEE 802.3af Class 0)
Power Input	12VDC, PoE
Power Consumption	8W
Approvals	FCC, CE

### DIMENSIONS

(Unit - mm)

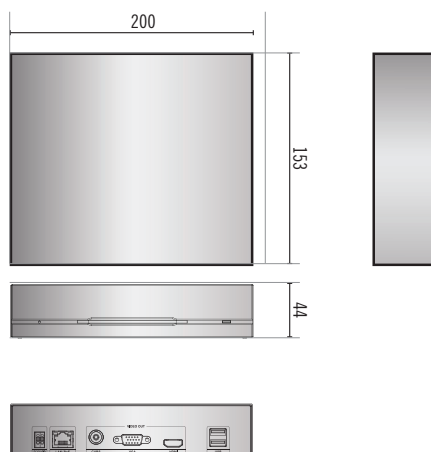


# DV-1104

**IDIS** **VA**  
in the Box

- Specialized in DirectIP NVR
- Supports 4ch IP Camera
- Supports People Counting
- Supports Heatmap
- Supports People Counting

DECODER	
Video Compression	H.264, H.265
Video Inputs	4ch IP
Supported Devices	DR-6308P, DR-6316PS, DR-6332PS, DR-8364 DR-8364D, DR-2304P, DR-2308P, DR-2316P
Max. Network Throughput	20Mbps
Network Connection	Gigabit Ethernet x 1
VA Support	People Counting Heatmap Queue Management (Max. 3 queues)
GENERAL	
Dimension (W x H x D)	200mm x 44mm x 153mm (7.9" x 1.7" x 6.0")
Unit Weight	0.74kg (1.6lb)
Operating Temperature	0°C to 40°C (32°F ~ 104°F)
PoE(class)	Yes(IEEE 802.3af Class 3)
Power source	12VDC, PoE
Power Consumption	6.6W
Approvals	FCC, CE, KC

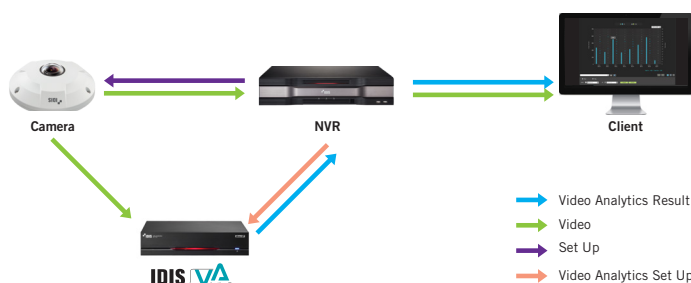

## Analytic Reports Reports and graphs

Report with graphs and thumbnails by setting a time period. Periodical analysis for each feature is available through the VMS "VA report" tab. You can check hourly/daily/weekly/monthly data in detail by simply entering a date and time. The data from the People Counting, Queue Management, and Heat Map functions can be reviewed individually or collectively.