

EXH

EX-PROOF HOUSING



MAIN FEATURES

Certifications Ex d for use in Zone 1 and 2, Group IIC (Gas), and in Zone Ex tb 21 and 22 (Dust)

Solid anticorodal aluminium construction

IP66

2 holes for cable glands 3/4" NPT

Version with device for the protection of the glass installed on the front of the housing (EXHD)

Supplied with heater. Sunshield as option.

Ambient temperature: -40°C/+50°C (-40°F/+122°F) with reinforced heater

Internal usable area (WxHxL): 100x100x280mm (3.9x3.9x11in)

DESCRIPTION

The EXH housings are made with strong Anticorodal aluminium die-cast alloy of AlSi Mg EN AB- 42000 group.

All external components are stove enameled using powder offering an excellent resistance to UV rays, salt-spray, environment polluting substances.

EXHC

The cylindrical body of the EXHC housing (210mm diameter and 400mm length) is closed on opposite sides by two 12 mm thick flanges. The housing is supplied with two holes for the 3/4" NPT cable glands. The camera housing is equipped with heater and optional sunshield.

EXHD

Ex-proof housing with the same specifications as the EXHC series but fitted with a patented device for the protection of the glass which gives clear vision in dirty environments.

The glass protection device consists of a connection flange with the housing, a closing flange and an explosion-proof central body containing a rugged and transparent glass, a motor powered in 24Vac, two windings and a transparent Mylar film, installed just in front of the glass. The motor drives, through four pinions with gear rim, the winding for recovering the dirty Mylar film, while at the same time the other winding installed on the opposite side releases the clean film.

NOTE: the control unit of the glass protection device is not supplied with the product.

The transparent Mylar film, 80mm wide and 18m long, allows 350 steps. When the film is dirty, the operator will activate the motor shifting the film to obtain a clean camera picture (the step for allowing the complete shift of the dirty film is about 50mm). The end of the Mylar film will be indicated to the operator through marks printed on the last 50cm of the film.



HOUSING EXHC + SUNSHIELD EXHS000



HOUSING EXHD + SUNSHIELD EXHS001

AVAILABLE MODELS

Model Number	Housing heater 24Vac	Housing heater 230Vac	Reinforced heater	Glass protection device	Ambient temperature
EXHC003R	✓	–	✓	–	-40°C / +50°C (-40°F/+122°F)
EXHC203R	–	✓	✓	–	-40°C / +50°C (-40°F/+122°F)
EXHD005R	✓	–	✓	✓	-40°C / +50°C (-40°F/+122°F)

TECHNICAL DATA

GENERAL

Non-corrosive die-cast aluminium (anticorrosive)

Epoxy powder painted with orange peel effect, RAL7032

MECHANICAL

2 holes for cable glands 3/4" NPT

External dimensions:

- EXHC Ø 210mmx427.5mm (8.2x16.8in)
- EXHD Ø 250x573.5mm (9.8x22.6in)

Internal dimensions:

- EXHC Ø 180x380mm (7x14.9in)
- EXHD Ø 180x460mm (7x18.1in)

Internal usable area:

- EXHC 100x100x280mm (3.9x3.9x11in)
- EXHD 100x100x280mm (3.9x3.9x11in)

Glass window extra clear:

- EXHC Ø 114mm (4.5in)
- EXHD 70x56mm (2.7x2.2in)

Unit weight:

- EXHC 15kg / 33lb
- EXHD 24kg / 52.9lb

Glass protection device:

- Glass protection device: Ø 250x140mm (9.8x5.5in)
- Mylar film 80mm (3.1in) wide and 18m (59ft) length, 350 shifting steps, marks printed on the last 50cm (19in)

ELECTRICAL

Reinforced heater: Ton 15°C±4°C (59°F±7°F), Toff 22°C±3°C (72°F±5°F)

- 3 resistors in the housing, consumption 60W max

Glass protection device:

- 24Vac, power consumption 2W max

Devices to install inside the housing

- Camera equipped with lens with max total power of 20W
- Voltage max. 24Vac or 230Vac
- Useful volume for camera / lens: 2800cm³
- Minimum distance between the walls of the housing and the camera/lens: 12mm

ENVIRONMENT

For installation indoors and outdoors

Operating temperature with heating: -40°C / +50°C (-40°F/+122°F)

Always refer to the temperature in the marking.

CERTIFICATIONS

ATEX (EN 60079-0:2012 +A11:2013, EN 60079-1:2014, EN 60079-31:2014):

⊕ II 2G Ex d IIC T6 Gb

⊕ II 2D Ex t IIIC T85 °C Db IP66

IECEX (IEC 60079-0:2011, IEC 60079-1:2014, IEC 60079-31:2013):

Ex d IIC T6 Gb

Ex t IIIC T85 °C Db IP66

EAC EX:

Ex II 2G Ex d IIC T6 Gb, -40°C/+50°C

Ex II 2D Ex t IIIC T85°C Db -40°C/+50°C, IP66

KCs 16-KA4B0-0057 -16-KA4B0-0058

Ex d IIC T6

Ex tb IIIC T85°C

ACCESSORIES

EXHS000	Sunshield 580mm (22.8in) for EXH series
EXHS001	Sunshield 650mm (25.6in) for EXHD
OCTEX3/4C	Cable gland in nickel-plated brass with gasket EX 3/4" NPT, unarmoured cable IECEX-ATEX-EAC Ex
OCTEXA3/4C	Cable gland in nickel-plated brass with gasket EX 3/4" NPT, armoured cable IECEX-ATEX-EAC Ex
OCTEXB3/4C	Barrier cable gland in nickel-plated brass 3/4" NPT, unarmoured cable IECEX-ATEX-EAC Ex
OCTEXBA3/4C	Barrier cable gland in nickel-plated brass 3/4" NPT, armoured cable IECEX-ATEX-EAC Ex
OCTEX3/4	Cable gland in nickel-plated brass with gasket EX 3/4" NPT, unarmoured cable ATEX
OCTEXA3/4	Cable gland in nickel-plated brass with gasket EX 3/4" NPT, armoured cable ATEX
OCTEXB1/2C	Barrier cable gland in nickel-plated brass EX 1/2" NPT, unarmoured cable IECEX-ATEX-EAC Ex
OCTEX1/2C	Cable gland in nickel-plated brass EX 1/2" NPT, unarmoured cable IECEX-ATEX-EAC Ex, with gasket from 3 to 8mm (0.12 to 0.31in)
OCTEXS1/2C	Cable gland in nickel-plated brass EX 1/2" NPT, unarmoured cable IECEX-ATEX-EAC Ex, with gasket from 7.5 to 11.9mm (3 to 4.7in)
OCTEXA1/2C	Cable gland in nickel-plated brass EX 1/2" NPT armoured cable IECEX-ATEX-EAC Ex, with gasket
OCTEX1/2-3/4C	Cable glands reduction in nickel-plated brass 3/4" - 1/2" NPT IECEX-ATEX-EAC Ex
OCTEXP3/4C	Conduit cable gland nickel-plated brass 3/4" NPT IECEX-ATEX- c CSA us - EAC Ex (operating temperature: from -60°C (-76°F) up to +80°C (+176°F))
OEXPLUG3/4	Plug EX 3/4" NPT IECEX-ATEX-EAC Ex

BRACKETS AND ADAPTORS

EXWBJ000	Bracket and ball joint RAL7032 for EXH series
EXBJ000	Only ball joint for EXH RAL7032 housings

SPARE PARTS

OEXMYLAR	Mylar film replacement kit, 18m (59ft), 350 steps
OEXVETN	Complete front flange with glass for EXHC and EXPTC series
OEXDPVN	Complete front flange with glass protection device for EXHD and EXPTD series, RAL7032
OSLIEX	Internal slide complete with heater for EXHC and EXPTC series
OSLIED	Internal slide complete with heater for EXHD and EXPTD series

PACKAGE


Model Number	Weight	Dimensions (WxHxL)	Master carton
EXHC003R	17.5kg (39lb)	61x32x31cm (24x12.6x12.2in)	-
EXHD005R	26.5kg (58lb)	43x67x67cm (17x26.3x26.3in)	-

1/2" NPT CABLE GLAND SELECTION GUIDE						
Cable gland type	Certification	Operating temperature	Cable	Cable glands product code	Diameter of the external cable (mm)	Under armor cable diameter (mm)
Barrier	IECEX/ATEX/EAC Ex	-60°C / +80°C (-76°F / +176°F)	Not armoured	OCTEXB1/2C	3 - 8	–
With gasket	IECEX/ATEX/EAC Ex	-60°C / +100°C (-76°F / +212°F)	Not armoured	OCTEX1/2C	3 - 8	–
			Not armoured	OCTEXS1/2C	7.5 - 11.9	–
			Armoured	OCTEXA1/2C	12.5 - 20.5	8.4 - 14.3


3/4" NPT CABLE GLAND SELECTION GUIDE						
Cable gland type	Certification	Operating temperature	Cable	Cable glands product code	Diameter of the external cable (mm)	Under armor cable diameter (mm)
Barrier	IECEX/ATEX/EAC Ex	-60°C / +80°C (-76°F / +176°F)	Not armoured	OCTEXB3/4C	13 - 20.2	–
			Armoured	OCTEXBA3/4C	16.9 - 26	–
With gasket	IECEX/ATEX/EAC Ex	-60°C / +100°C (-76°F / +212°F)	Not armoured	OCTEX3/4C	13 - 20.2	–
			Armoured	OCTEXA3/4C	16.9 - 26	11.1 - 19.7
	ATEX	-20°C / +80°C (-4°F / +176°F)	Not armoured	OCTEX3/4	14 - 17	–
			Armoured	OCTEXA3/4	18 - 23	14 - 17

TECHNICAL DRAWINGS

The dimensions of the drawings are in millimetres.

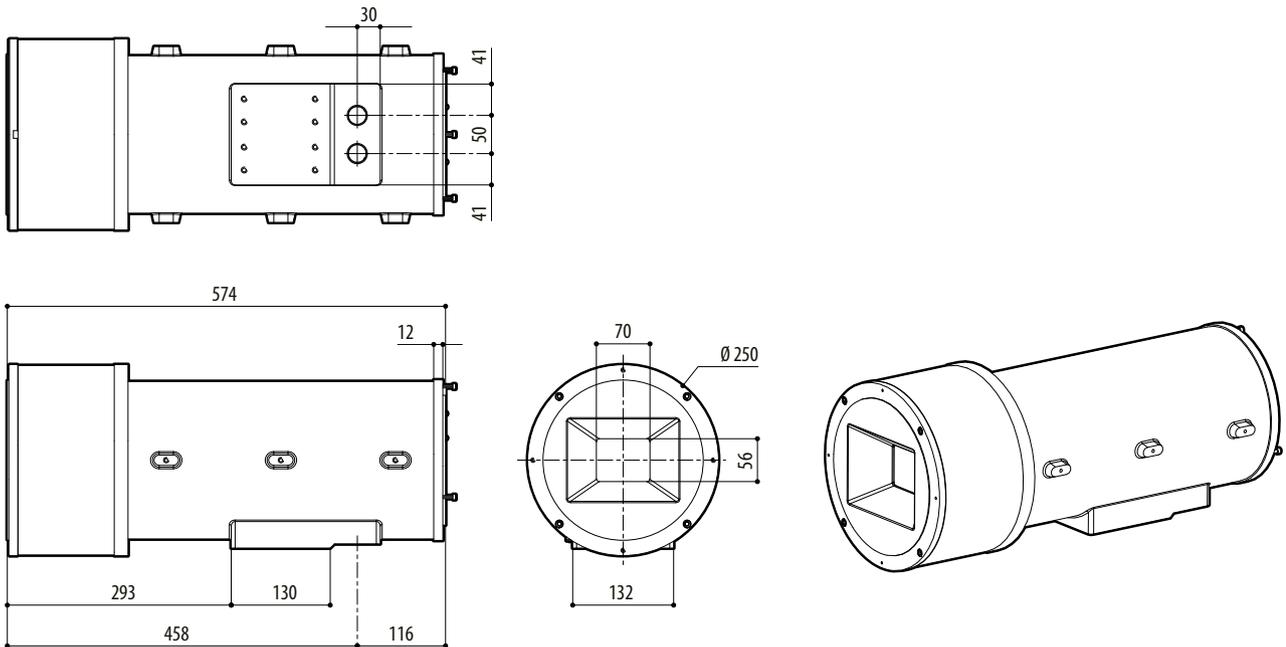

EXHD

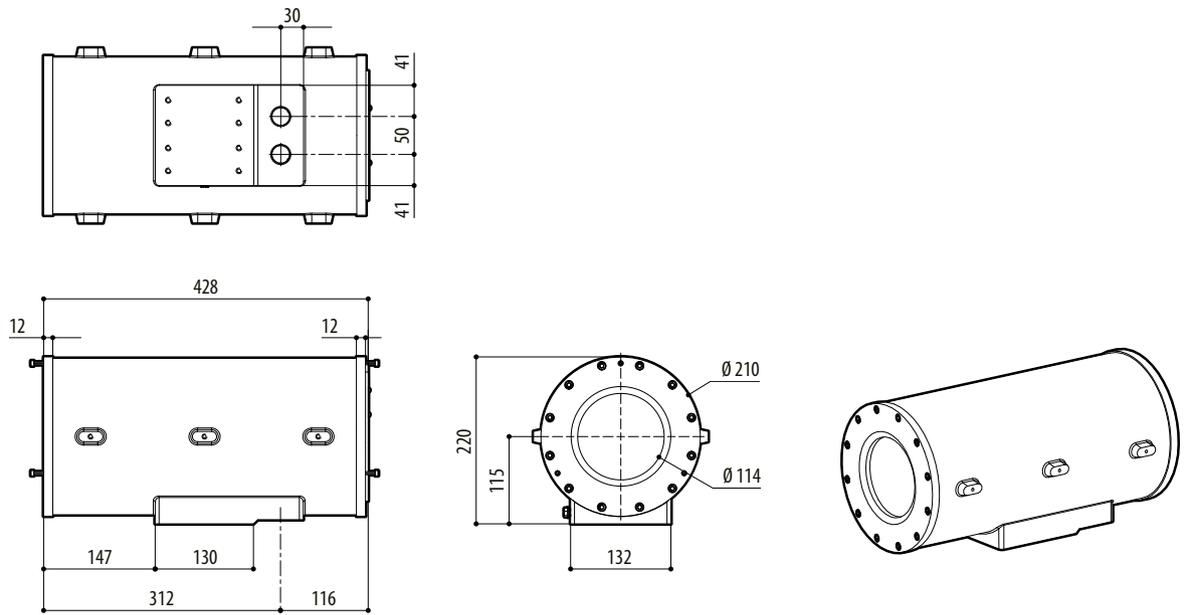

EXHC